


## O-LOX<sup>®</sup> Super posts

### Product detail

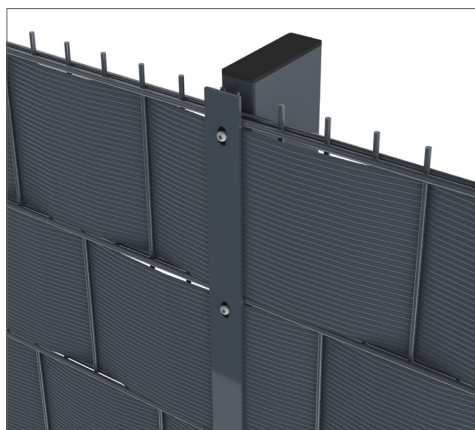

with stainless steel fixing plate

### BENEFITS

- Strong and rigid post system for combination with privacy strips
- Post profile suitable for fence heights up to 4 m
- Steps of 200 mm are possible

#### Profile

- Posts are foreseen of inserts every 200 - 400 mm
- PA clamps to support the panels are fixed to the posts with inserts M8
- Cross section post: 120 x 40 mm
- Plate thickness: 2 mm, depending on the height of the fence
- $I/V = 17.34 \text{ cm}^3$

#### Accessories

- Posts are standard foreseen with a post cap
- Flat steel cover plates (40x4mm)
- Stainless steel fixing plates of butterfly fixators
- Coverplate or fixing plates are bolted to the post with stainless steel bolts M8x40
- Corner clamps



#### Coating technique

Galvanised in-and outside (275 g/m<sup>2</sup> - both sides combined) and plastic coated (min. 60 micron)

#### Colours

Standard available in galvanised execution, in green (RAL 6005) and grey (RAL 7016). Other colours are available on request.

#### Options

Posts can also be delivered with welded floorplates. Other heights are available on request.

#### O-LOX<sup>®</sup> SUPER POSTS - PANELS WITH PRIVACY INFILL (IN CONCRETE)

Panel height mm	Post section mm	Post length mm	Inserts
1830	120 x 40 x 2	2400	6
2030	120 x 40 x 2	2600	7

#### O-LOX<sup>®</sup> SUPER POSTS - PANELS WITH PRIVACY INFILL (ON FOOTPLATE)

Panel height mm	Post section mm	Post length mm	Inserts
1830	120 x 40 x 2	1884	6
2030	120 x 40 x 2	2084	7

#### O-LOX<sup>®</sup> SUPER POSTS - PANELS NOT FILLED

Panel height mm	Post section mm	Post length mm	Inserts
3060 (1030 + 2030)	120 x 40 x 2	3800	11
4060 (2030 + 2030)	120 x 40 x 2	4800	14

### Compatible products

- Nylofor 2D/2DS
- Screno Wave