




**Ursus®**  
**Ursus® Heavy**  
**Ursus® Heavy AS**

**Knotted mesh**

Ursus, the ideal solution for fencing meadows, farming and breeding grounds.

**Product detail**

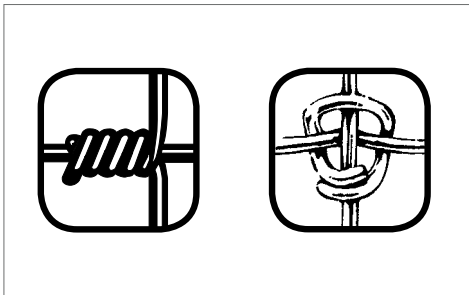

**BENEFITS**

**Ursus**

Thanks to the specially developed ZincaLu® coating, the life span of the wire extends by at least 50%, in comparison to heavily galvanised coating. The Ursus fence is very easy to install, and the size range suites a wide range of applications.


**Ursus Heavy**

The ZincaLu coating ensures a high longevity of the fence. Very good price/quality ratio. Degressive mesh repartition on specific types. Very strong ringlock knot.

**Ursus Heavy AS**

This fence offers the same benefits as Ursus Heavy, but is combined with high tensile horizontal wires to give increased strength with lower wire diameters. This reduces the roll weight and increases the distance between the intermediate posts, resulting in a faster and cheaper installation.


**Security level**

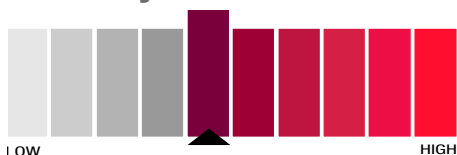

**Applications**



**Functionalities**




**Ursus**



**Coating: Zincalu**

Wire diameter and tensile strength:  
 line wire: Ø 1,80 mm - 700/900 N/mm<sup>2</sup>  
 stay wire: Ø 1,85 mm - 400/550 N/mm<sup>2</sup>  
 selvage wire: Ø 2,45 mm - 650/850 N/mm<sup>2</sup>

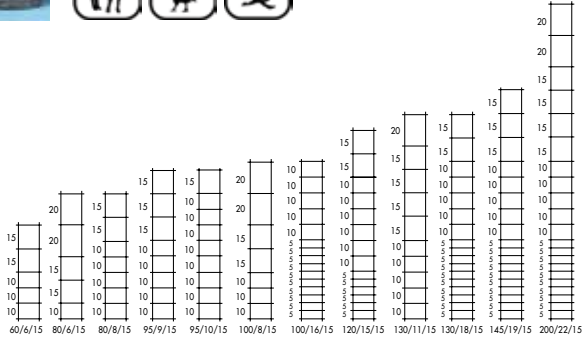

URSUS			
Roll height cm	N° horizontal wires	Distance between vertical wires cm	Type
Rolls of 50 m			
60	6	15	60/6/15
80	6	15	80/6/15
80	8	15	80/8/15
95	9	15	95/9/15
95	10	15	95/10/15
100	8	15	100/8/15
100	16	15	100/16/15
120	15	15	120/15/15
130	11	15	130/11/15
130	18	15	130/18/15
145	19	15	145/19/15
200	22	15	200/22/15
Rolls of 100 m			
80	8	15	80/8/15
95	10	15	95/10/15
100	8	15	100/8/15
120	9	15	120/9/15
150	18	15	150/18/15

**Ursus Heavy**



**Coating: Zincalu Super**

Wire diameter and tensile strength:  
 line wire: Ø 3,00 mm - 600/800 N/mm<sup>2</sup>  
 stay wire: Ø 3,00 mm - 600/800 N/mm<sup>2</sup>  
 selvage wire: Ø 3,70 mm - 550/750 N/mm<sup>2</sup>  
 Ursus knot: Ø 3,00 mm - 400/550 N/mm<sup>2</sup>




URSUS HEAVY			
Roll height cm	N° horizontal wires	Distance between vertical wires cm	Type
Rolls of 50 m			
80	8	15	80/8/15
100	6	15	100/6/15
100	10	15	100/10/15
120	7	15	120/7/15
120	11	15	120/11/15
140	12	15	140/12/15

**Ursus Heavy AS**



**Coating: Zincalu Super**

Wire diameter and tensile strength:  
 line wire: Ø 2,50 mm - 1150/1350 N/mm<sup>2</sup>  
 stay wire: Ø 2,50 mm - 650/850 N/mm<sup>2</sup>  
 selvage wire: Ø 3,00 mm - 1050/1250 N/mm<sup>2</sup>  
 Ursus knot: 3,00 mm - 400/550 N/mm<sup>2</sup>

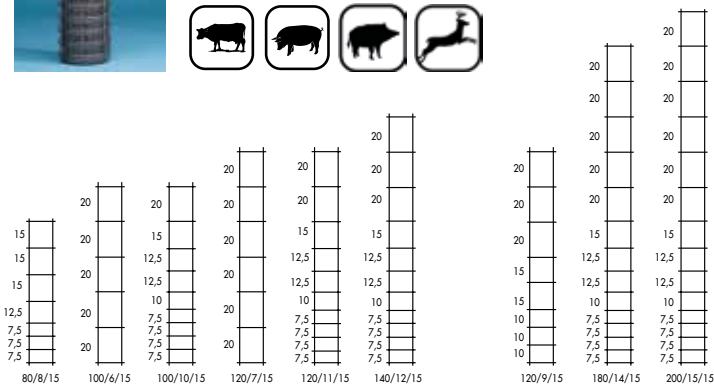

URSUS HEAVY AS			
Roll height cm	N° horizontal wires	Distance between vertical wires cm	Type
Rolls of 75 m			
120	9	15	120/9/15
Rolls of 50 m			
180	14	15	180/14/15
200	15	15	200/15/15

**Ursus Heavy**

**Ursus Heavy AS**

