

O-LOX[®] Super posts

Posts


Rigid post system with cover plate or stainless steel fixing plate.

Possible to combine with privacy strips.

BENEFITS

- Strong and rigid post system for combination with privacy strips
- Post profile suitable for fence heights up to 4 m
- Steps of 200 mm are possible

Product detail

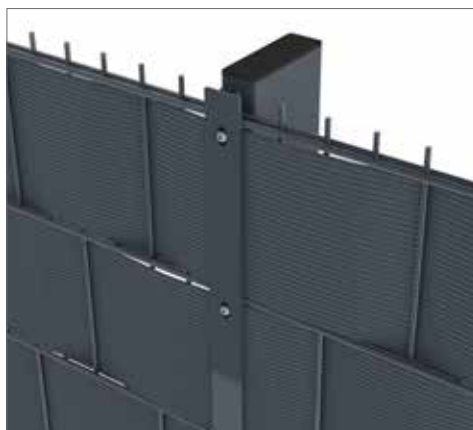

with stainless steel fixing plate

Profile

- Posts are foreseen of inserts every 200 - 400 mm
- PA clamps to support the panels are fixed to the posts with inserts M8
- Cross section post: 120 x 40 mm
- Plate thickness: 2 mm, depending on the height of the fence
- $I/V = 17.34 \text{ cm}^3$

Accessories

- Posts are standard foreseen with a post cap
- Flat steel cover plates (40x4mm)
- Stainless steel fixing plates of butterfly fixators
- Cover plate or fixing plates are bolted to the post with stainless steel bolts M8x40
- Corner clamps



Coating technique

Zendzimir profiles and PES coating (min. 60 micron)



Colours

Standard available in galvanised execution, in green (RAL 6005) and grey (RAL 7016). Other colours are available on request.

Options

Posts can also be delivered with welded floorplates. Other heights are available on request.

O-LOX[®] SUPER POSTS - PANELS WITH PRIVACY INFILL (IN CONCRETE)

Panel height mm	Post section mm	Post length mm	Inserts
1830	120 x 40 x 2	2400	6
2030	120 x 40 x 2	2700	7

O-LOX[®] SUPER POSTS - PANELS WITH PRIVACY INFILL (ON FOOTPLATE)

Panel height mm	Post section mm	Post length mm	Inserts
1830	120 x 40 x 2	1884	6
2030	120 x 40 x 2	2084	7

O-LOX[®] SUPER POSTS - PANELS NOT FILLED

Panel height mm	Post section mm	Post length mm	Inserts
3060 (1030 + 2030)	120 x 40 x 2	3800	11
4060 (2030 + 2030)	120 x 40 x 2	4800	14

Compatible products

- Nylofor 2D/2DS
- Screno Wave

