



Nylofor® F

The Nylofor F system consists of heavy welded mesh fence panels with horizontal flat wires providing maximum rigidity and an original design.



Benefits

High rigidity

The 15 x 6mm horizontal flat wires provide high rigidity to the panels.

Modern look

The use of Nylofor F panels with flat horizontal wires is modern and at the same time very robust.

Long lifetime

The high quality of the coating ensures a long lifetime. After being zinc coated, the products are protected by a polyester coating with a perfect adhesion.


Quick installation

The different post systems compatible with Nylofor F guarantee a quick and professional installation.

Complete and versatile system

The Nylofor F system is a professional system with panels of different heights, in combination with several types of posts and a wide assortment of swing and sliding gates.

Product detail

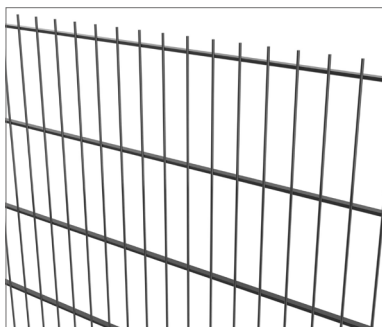

Functionalities




Security level

(when compared to other **residential and medium security panel** options)




Post and fixing systems

(post shape illustrated below)




Nylofor® Twilfix®

Metal post dimension **60 x 60mm**, with M8 inserts on one face and a plastic cap. Panels are attached to the front part using fixators and safety fastening system.




Bekafix®

Metal posts dimension **70 x 44mm**, H-shape with hook plastic cap. Panels are attached to the side of the posts using polyamide or a metal fixator.




Bekafix® Ultra

Metal posts dimension **70 x 44mm**, H-shape with hook plastic cap. Coating and post steel strength are higher, for corrosive environment or high fences. Panels are attached to the side of the posts using a metal fixator.



UniLox®

Metal posts dimension **70 x 64/70 x 44mm**, H-shape with flat plastic cap. Compatible with two installation methods (po/pa/po or po/po/pa). Panels are attached to the side of the posts using a metal fixator. Plastic flat cap on top of the post.



E-Lox®

Metal posts dimension **60 x 40mm**, with plastic cap on top. Panels are fixed to the front of the post thanks to a stainless steel hook. Panels are then connected to each other with a connector for an "endless" installation.

- For more information on the above posts, please refer to the relevant product page or flyer

Panels

The panels are 2500mm width and in a range of heights: 630 to 2430mm.

- Mesh size: 200 x 50 mm
- Horizontal flat wire: 15 x 6mm
- Vertical wire diameter: 5mm

Coating technique



Panels are made of pre-galvanised wire (average coating thickness >10µm) and polyester top layer with a minimum a layer thickness of 100 microns. The PES coating thickness is the average of 10 measurements.

Colours

Green RAL 6005 and Anthracite RAL 7016. Other colours are available on request.

Gates

The Nylofor F system is completed by the secure and high quality Robusta Nylofor F single or double swing gate or sliding gate.

Nylofor® F range	
Fence height (mm)	Panels width x height (mm)
630	2500 x 630
830	2500 x 830
1030	2500 x 1030
1230	2500 x 1230
1430	2500 x 1430
1630	2500 x 1630
1830	2500 x 1830
2030	2500 x 2030
2230	2500 x 2230
2430	2500 x 2430

Europe: Blokkestraat 34b,
B-8550 Zwevegem
Tel: B: +32 56 73 46 46

USA: 3309 SW Interstate 45,
Ennis, TX 75119
Tel: +1 972 878 7000

Middle East: P.O. Box 293517 DAFZA,
Building E 5, Block A 8th Floor, Office 802
Tel: +971 04 6091122

Africa: B10, Bergriver Business Park,
Paarl, 7646
Tel: +27 021 868 7300

Betafence is the world market leader in fencing solutions, access control and detection for perimeter protection. All Betafence companies and product names are trademarks owned by PRÆSIDIAD Group Limited. Modification in products and assortment are subject to change without prior notice.

Proud to be a PRÆSIDIAD brand. Betafence is part of a global network, working alongside Hesco as a leader in perimeter security systems and solutions. For more information please visit praesidiad.com.

BETAFENCE
Securing What Matters

betafence.com