


Specials

Barbed wire with alternately twisted wires.

The 2 running wires are alternately twisted between the 4-point barbs.

Product detail

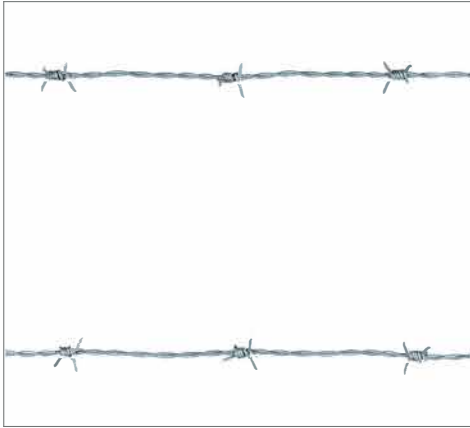

Wire

The high-carbon steel wires are every 10 cm provided with 4-point barbs.

Zincalu:

- tensile strength of the line wires : min. 1150 N/mm² (before stranding)
- tensile strength of the barb wire: 700/900 N/mm²
- breaking load of the strand wire: min. 4230 N

Wire diameter

Zincalu:

- line wire: 1,70 mm
- barb wire: 1,45 mm

Coating

Zincalu coating

Assortment

Motto Zincalu:

Length of the rolls: 50-100-250-500 m

Europe
Blokkestraat 34b
B-8550 Zwevegem
Tel: B: +32 56 73 46 46
Tel: NL: 0800 022 76 98

USA
3309 SW Interstate 45
Ennis,
TX 75119
Tel: +1 972 878 7000

Middle East
P.O. Box 293517 DAFZA,
Building E 5, Block A
8th Floor, Office 802
Tel: +971 04 6091122

Africa
B10, Bergriver Business Park
Paarl,
7646
Tel: +27 021 868 7300