

Corner posts

Corner posts are available for Standard 90° external and internal corners. Obtuse corners are achieved using standard Intermediate posts. End posts are not required.

Gradients

All standard Intermediate & Corner posts are fitted with 2no. additional threaded inserts at the top & bottom to facilitate 100mm steps between adjoining panels. Different gradients are achieved by reducing the post centres and width of panel to suit, ie :

- 3000 wide standard panel with 100mm step : 1 in 30 (3.3%) (1.9°)
- 2500 wide standard panel with 100mm step : 1 in 25 (4%) (2.3°)
- 2000 wide site-cut panel with 100mm step : 1 in 20 (5%) (2.9°)
- 1500 wide site-cut panel with 100mm step : 1 in 15 (6.6%) (3.8°)
- 1000 wide site-cut panel with 100mm step : 1 in 10 (10%) (5.7°)

Steeper slopes will require made-to-order extra long posts, manufactured with additional threaded inserts to suit the stepping required between adjoining panels to suit each gradient.

Notes

The preferred method of installation is : Post - Panel - Post - Panel, etc. Bolts may be installed using a Power-Driver and Power-Bit if preferred. When using hand tools, care must be taken to avoid over tightening of bolts.

Panels are secured to the front face of the posts using 25 x 5mm slotted flat Clamp Bars. All Clamp Bars to be fastened with M8 x 40 stainless steel button-head Permabolts bolts and flat washers.

3.025m wide Paladin panels, positioned approx 10mm below the top of the posts, and overlapped 50mm approx.



Twilfix 2000 Intermediate Posts fitted with M8 threaded Inserts in the front face, and supplied with black plastic top caps for fitting on-site.

Concrete Foundations must not be leaner by mass than 1 part cement to 10 parts 20mm nominal size graded aggregates, and must be thoroughly compacted prior to the initial set.


All Paladin Classic panels are supplied to site in a standard width of 3025mm. Panels for make-up bays are to be cut to suit on site, and made good using a Zinc Etch Primer, followed by a top coat of polyurethane repair paint.

<u>Dim : A</u> Panel Height	<u>Number</u> of Beams	<u>Dim : B</u> Length Of Post	<u>Dim : C</u> Size Of Found's	<u>Dim : D</u> Depth Of Found's	<u>Fixings</u> <u>Level</u> <u>Ground</u>	<u>Fixings</u> <u>Sloping</u> <u>Ground</u>	IMPORTANT NOTE : The Foundation sizes indicated are for "normal" ground conditions only and may require modification to suit the prevailing ground conditions on site.
925mm	2no.	1500mm	300mm	400mm	3no.	3no.	
1240mm	2no.	1800mm	300mm	500mm	4no.	4no.	
1850mm	2no.	2500mm	300mm	600mm	5no.	5no.	
2040mm	3no.	2700mm	300mm	600mm	5no.	5no.	
2440mm	3no.	3100mm	300mm	600mm	7no.	7no.	


The Paladin Classic fencing system generally satisfies the requirements for **Category : 1 (General Purpose)** & **Category : 2 (Security)** fences as prescribed by B.S. 1722 Part : 14 - Open Mesh Steel Panel Fences

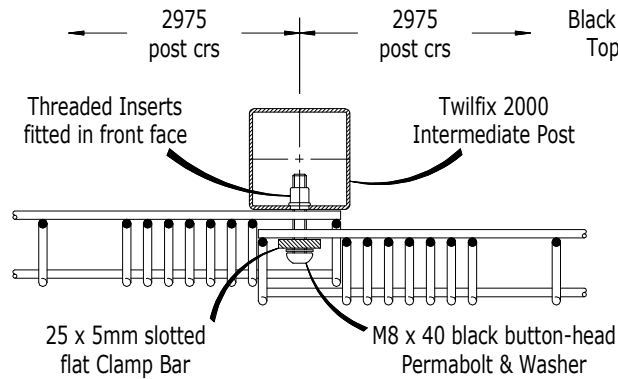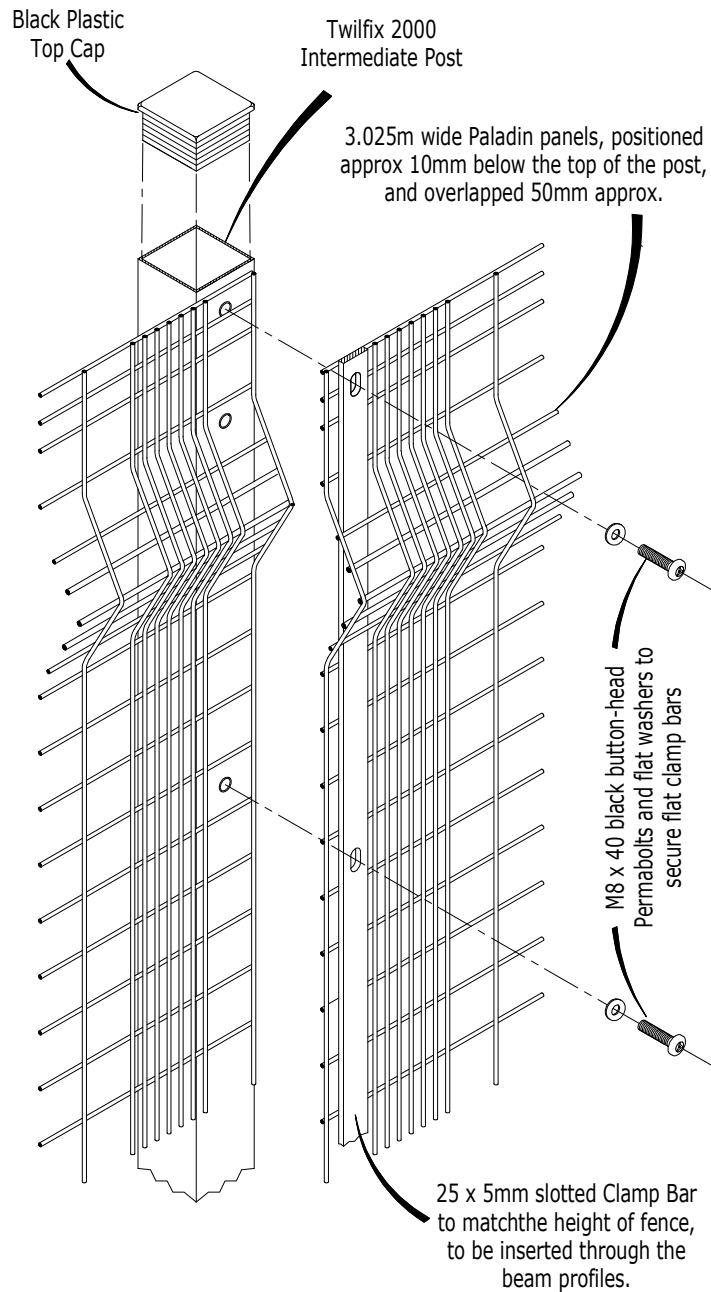


PLAN VIEW ON INTERMEDIATE POST

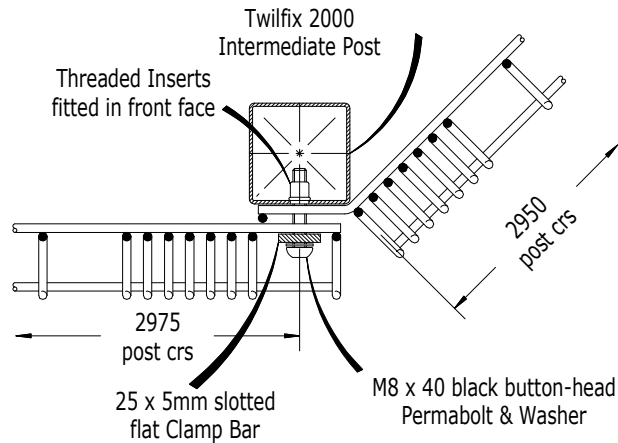

PLAN VIEW ON OBTUSE CORNER POST

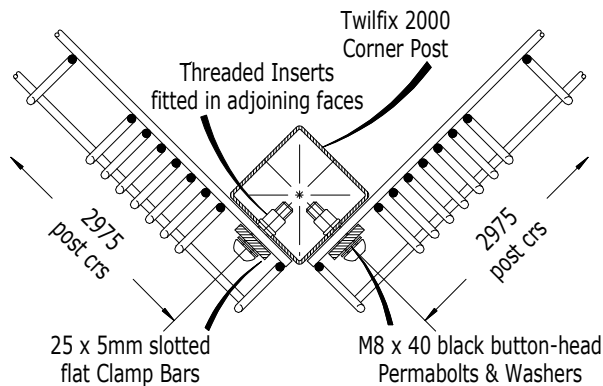

PLAN VIEW ON 90° CORNER POST

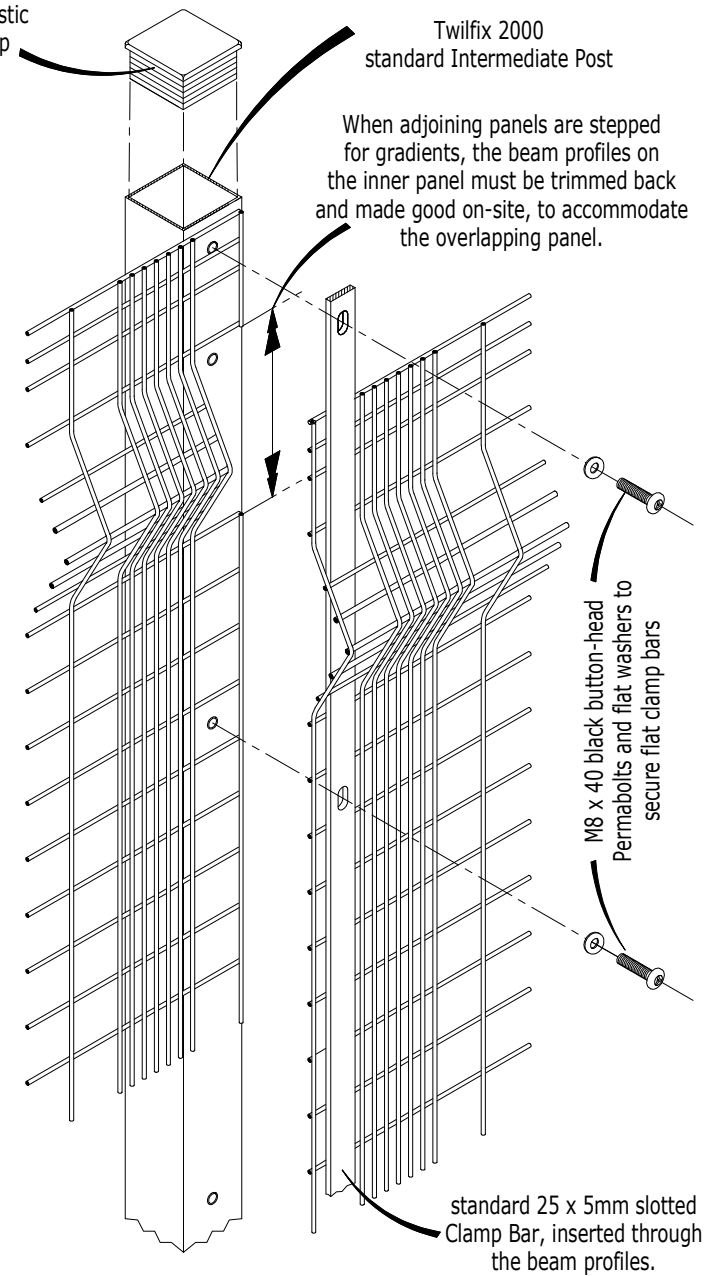

STEPPING DETAIL FOR SLOPING GROUND

TYPICAL POST AND PANEL FIXING DETAIL

B BETA FENCE

sales.sheffield@betafence.com
www.betafence.co.uk

Betafence Limited
Unit B, Forge House
21 Carbrook Hall Road
Sheffield, S9 2EH
Tel: 0114 256 7800

Betafence Ltd. reserves the right to
amend and withdraw products
detailed herein, without prior notice

COPYRIGHT © 2014
BETA FENCE LTD - SHEFFIELD - ENGLAND

PALADIN CLASSIC

Drawn

RB

Date

12.02.14

Drawing No :

PP-03-B

REV
C