


## Bekafix® Super posts

### Posts

Profile post, based on the Bekafix concept, with high rigidity for medium to high security applications, at excellent price-quality ratio.

### Product detail

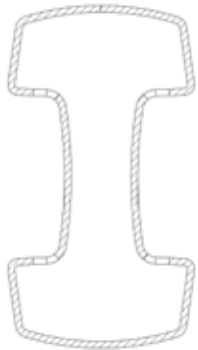

### BENEFITS

With the Bekafix Super post, all the benefits of the standard Bekafix post are kept, but by increasing the inertia considerably, its application range has become much wider.

- **Unique aesthetics and shape**
- **Quick installation**
- **Concrete plates can be put directly in between the posts, without need for specific plate holders**

### Profile

- Tubular post, profiled in "H" shape, cross section of the post: 100 x 54 mm, plate thickness: 2 mm
- With central holes every 15 cm, for fixing of the special metal security clips with bolts
- With side punched holes for positioning and fixing of the panels by means of fixing clips
- I/V: 14,75 cm<sup>3</sup>
- Post cap with hook to hang panels for ease of installation

### Accessories

- Security fixing system: plastic coated metal clip with, as an option, one-way security bolt
- Bekafix Super installation plier
- Spider fixing for installation of Securifor panels
- Base plate for installation on tiles or concrete floor
- Single or double bent arms for Bekafix Super posts

### Coating technique

Galvanised: inside and outside and polyester coated (minimum 60 microns)



### Colours

Green RAL 6005.

Other colours are available on request.

### BEKAFIX® SUPER POSTS

Panel height mm	Post length mm	Number of fixators per intermediate post	Number of fixators per end post
2000	2600	2 x 4	1 x 4
2400	3200	2 x 4	1 x 4
3100	3800	2 x 6	1 x 6
4100	4800	2 x 8	1 x 8

Other heights available on request

### Compatible products

- All Nylofor panels
- Securifor panels up to 3 m

