




CreaZen®

Panels

CreaZen is a completely new railing system with an attractive design, inspired by natural elements.

Product detail

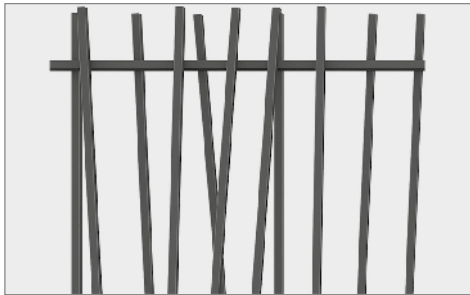

BENEFITS

Stylish

This panel, with its criss-cross design of natural lines, is inspired by the current trend of decorative new style railings. A modern take on a classical concept.


Pure design

The square tubes of this particular fence panel provide a balanced aesthetic and a clean-cut look.

Sleek installation

This new panel retains its sleek exterior thanks to almost invisible fixings, and is also easy to install with our compatible range of Bekafix posts.


Security level

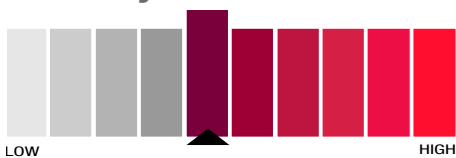

Applications



Functionalities





Panels

The panels have a width of 2400 mm and are available in a range of heights from 1000 to 2000 mm.

The vertical square tubes are welded at both sides of the horizontal tubes, in a criss-cross way.

Spacing between the vertical tubes is max. 110 mm

Horizontal rectangular tubes: 40 x 20 mm

Vertical square tubes: 20 x 20 mm

Posts and fixation




Bekafix posts

CreaZen panels are installed with Bekafix posts. They are easily fixed to the posts by making use of specific fixators.

Gates

CreaZen fences can be combined with CreaZen gates, available as a single and double swing gates.

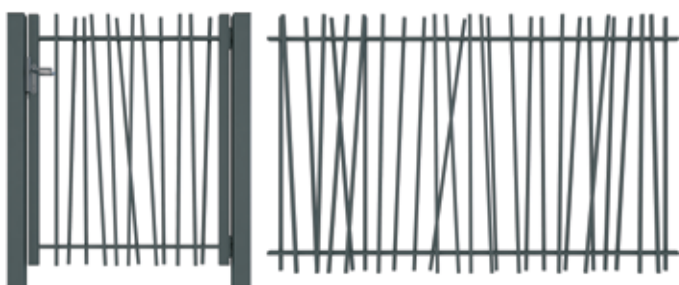

Coating technique

The welded panel is hot dip galvanized and polyester coated (min 60 micron). The Bekafix posts are galvanized inside and out and polyester coated (min. 60 micron).

Accessories

Several installation accessories are available:

- fixation clamps (plastic), with stainless steel nuts and bolts
- base plates
- corner fixators for installing panels in an angle
- closing caps for vertical tubes
- Bekafix flat caps without hook

Colours

Anthracite RAL 7016

Other colours on request

ASSORTMENT CREAZEN

Fence height mm	Dimensions panels (width x height) mm	Height post to be put in concrete mm	Height post combined with base plate mm	Number of fixings per post
1000	2400 x 1000	1475	1075	4
1200	2400 x 1200	1675	1275	4
1500	2400 x 1500	1975	1575	4
1700	2400 x 1700	2175	1775	4
2000	2400 x 2000	2575	2075	4

