




## Rempart®

### Welded mesh

Welded fence with progressive mesh.

### Product detail

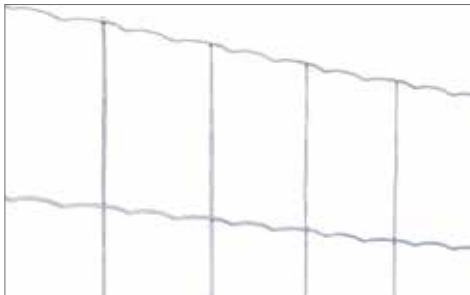

### BENEFITS

#### **Strong and rigid**

Heavy wire diameters, welded at every intersection. Fence height up to 2,5 m.

#### **Long lifetime**


The Zinalu coating ensures a high longevity of the fence. Very good price/quality ratio. Degressive mesh repartition possible.

#### **Long distance**

Optimal solution for long distance fences.

Fast and easy installation in combination with Bekaclip post system.


### Security level

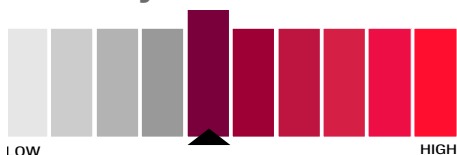

### Applications




### Functionalities



## Mesh

Welded fence with progressive mesh.  
Length of rolls: 50 meters

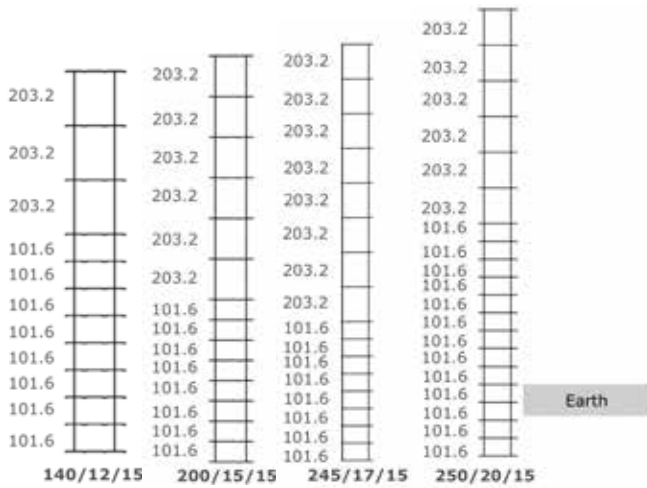

## Coating technique

ZINCALU: alloy of Zinc and Aluminium (95% of Zinc + 5% of Aluminium)  
PVC coated: green BF 6073 (on request)

## Wire

- Selvedge wire: Ø 3,40 mm
- Horizontal and vertical wires: Ø 3,00 mm
- Double crimp in the horizontal wire in every mesh

## Posts



### Bekaclip posts

Welded tubular posts with mesh fixing strip. In and outside galvanised with a min. layer thickness of 275 g/m<sup>2</sup> (2 sides combined) following Euro standard EN 10346. Galvanised and plastic coated with polyester with a min. layer thickness of 60 micron. Fixing clips in stainless steel.

## HEAVY REMPART

Roll height cm	N° of horizontal wires	Distance between vertical wires cm	Types
140	12	15	140/12/15
200	15	15	200/15/15
245	17	15	245/17/15
250	20	15	250/20/15
OPTION: PVC coated (selvedge 3,50 mm/other 3,00 mm)			
140	12	15	140/12/15
200	15	15	200/15/15

